


KTA104 | Telephone Coupler



Use

KTA104 telephone coupler is a safe isolation device (relevant with device is KTH intrinsically safe telephone) used in the communication network combined with KTH intrinsically safe telephone and dispatching station or exchange board in the explosive dangerous environment.

Meaning of Type

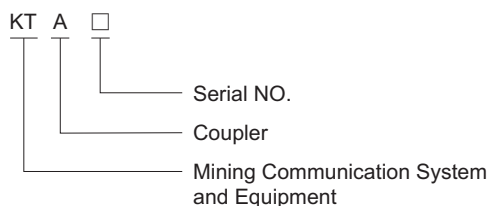

Technical Descriptions

Safe, reliable, compact and easy for operation.

Technical Data

Type	Input (Non- intrinsically safe type)					Output (intrinsically safe type)				Dimension L × W × H (mm)	Weight (kg)
	Max. voltage (V)	Max. current (mA)	Max. ringing voltage (V)	Ringing working frequency (Hz)	Max. ringing current (mA)	Max. output voltage (V)	Max. output current (mA)	Max. ringing output voltage (V)	Max. ringing output current (mA)		
KTA104	DC60V	60mA	90V	26Hz~60Hz	90mA	DC60V	DC40mA	60V	38mA	90×37×73	2